


Making existing interlinked BS5839-6 domestic Smoke & Heat Alarm systems accessible to deaf & hard of hearing people

The Silent Alert Smoke / Carbon Monoxide Monitor is designed to link to LD1, LD2 & LD3 compliant domestic smoke & heat alarm systems, automatically alerting deaf and hard of hearing people of an alarm to a vibrating pager and SignWave flashing sounder.

Linked via a relay to interlinked systems any existing compliant system can be made accessible to deaf and hard of hearing people without the need to double up or replace existing detectors.

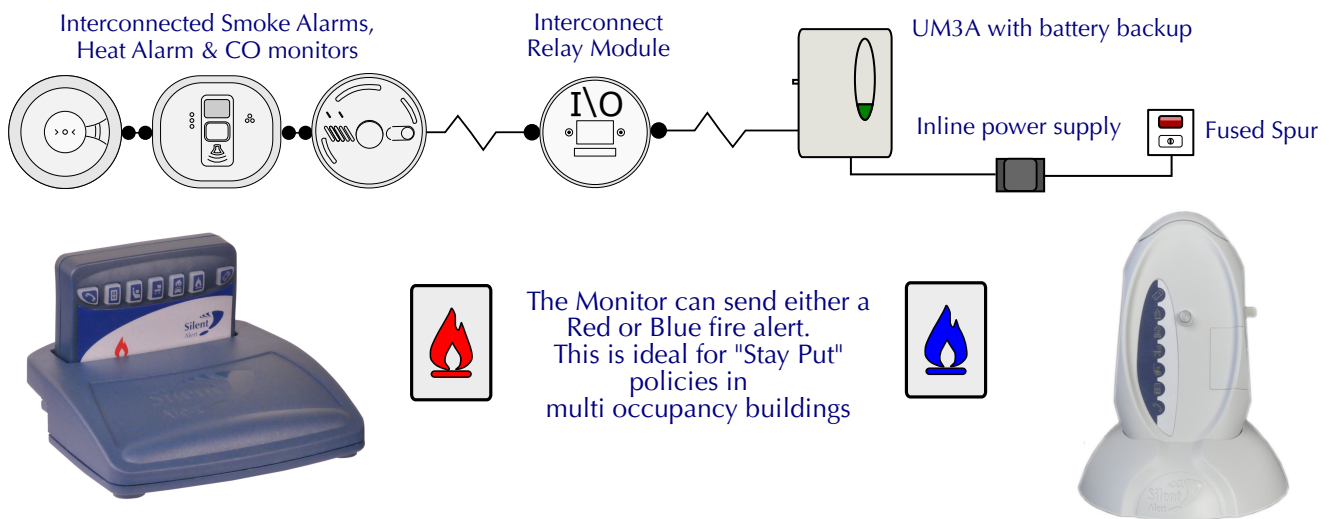

The vibrating pager provides a portable alert during the day and night cover is provided via a vibrating pillow pad. The SignWave has a two tone (500Hz & 3000Hz) audio alarm and a bright LED strobe together with a vibrating pillow pad for night.

The Silent Alert system is compatible with the BS5839-1 Fire Safe system which links into main fire alarm systems. A user can be alerted when their own smoke alarms activate, as well as the main building alarm and differentiate between the two so as they can follow any stay put or evacuation policy.

- Simple to retro fit to existing interlinked smoke, heat & CO alarm systems
- Mains powered with battery backup with automatic power failure alarms
- Compatible with the Silent Alert Fire Safe System for fire alarms
- Dual tone audio alarm
- Automatic radio signal failure alarm
- Door, Entry Phone and other alerting options can be added from the Silent Alert range.



Made in the UK

