



FEATURES

- When the mat, which is equipped with sensors and a signal transmitter, detects that pressure is being applied, it sends a signal to the receiver that then starts ringing and flashing.

TECHNICAL SPECIFICATIONS

Receiver


- Adjustable ringer volume: 85dB (HI) or 70dB (LO)
- Visual ring indicator: flash
- Power switch with 3 positions:
 - ALARM: flashes and rings for 30 seconds every 10 seconds
 - OFF: device is switched off
 - CHIME: flashes and rings for 5 seconds every 30 seconds
- Low battery alert signal
- Distance between receiver and transmitter: maximum 30 meters
- Size of the receiver: 89 x 126 mm
- Weight of the receiver: 122g
- 3 X 1.5V LR14 type batteries (not included)
- DC adaptor socket (6V DC/0.3A)

Transmitter

- Frequency: 433,92MHz
- Radio frequency power: < 250 mW
- Size of the transmitter: 65 x 34 mm
- Weight of the transmitter: 13g
- 1XCR2032 type battery (not included)
- Autonomy: about 10 months (assuming pressure is applied on it 30 times every day on average)

Mat

- Size of the mat: 36 x 56 cm
- Weight of the mat: 167g
- Material: PVC plastic

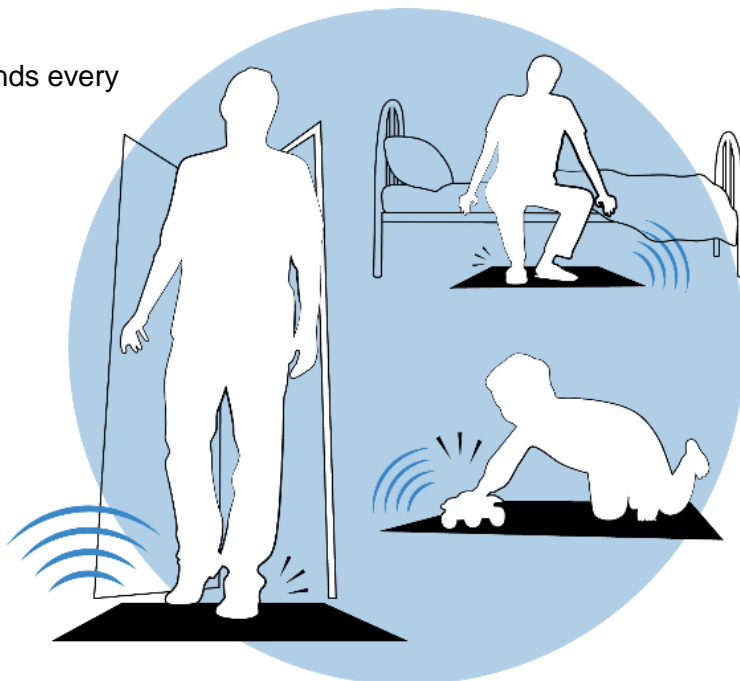

AVAILABLE IN OPTION

- Mains adaptor (6V DC/0.3A)